


1700

SEWER VENT CHECK VALVE

Cast in either 356-T6 aluminum alloy, or stainless steel. The 1700 Series allows for ventilation while in the open position. Our patented float design automatically seals off the vent pipe to prevent inflow of water into the lines. A stainless steel insect screen and flame screen keep debris from entering the vent pipe. All hardware is 316 stainless steel, and the valve body is powder coated with a special epoxy that is highly resistant to sewer gases and acids.

- Restricts inflow
- Allows for ventilation
- Reduces the need for high risers
- Minimizes piping requirements
- Easy to install or retrofit

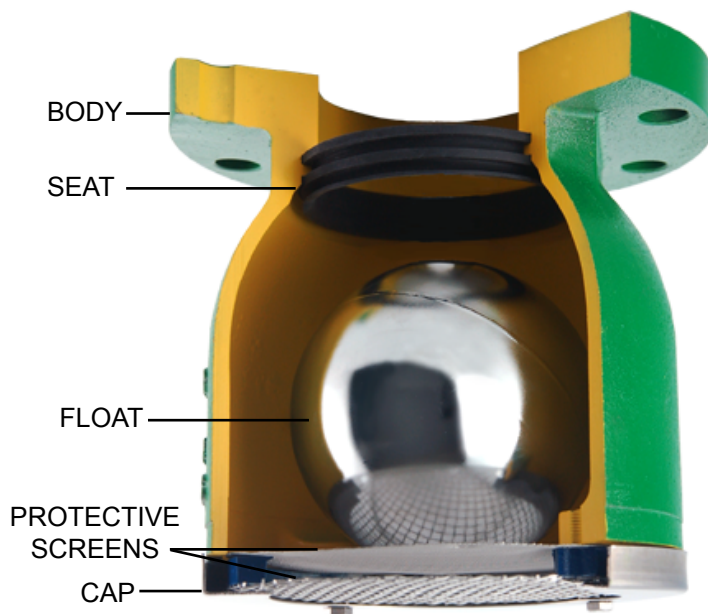

SPECIFICATIONS

BODY

- 356-T6 ALUMINUM ALLOY
- POWDER COATED GRASS GREEN
- 4" OR 6" INLET
- MINIMUM 1 TO1 RATIO OF OPEN AREA FOR AIRFLOW

GASKET

- NITRILE GASKET

FLOAT

- HDPE FLOAT BALL

SCREENS

- 316 STAINLESS INSECT SCREENS
- 1/4 X 1/4 BUG
- 30/30 MESH

CAP

- 316 STAINLESS STEEL HARDWARE



WAGER
C O M P A N Y

WWW.WAGERUSA.COM
Toll Free USA: 800-562-7024