


1850 ODOR CONTROL SEWER VALVE

The 1850 is a combined odor control vent valve, with the additional feature of a ball check to prevent water from submerging the media bed, as well as prevent inflow of flood waters into the lines.

The 1850 connects to a candy cane style pipe. It is designed to allow for venting in the open position. The interior of the body contains a canister filled with 12 lbs of odor media. The media is in pellet form allowing for better airflow thru the media bed, and is highly effective in removing hydrogen sulfide gas (H₂S). Pellets are non-toxic, and landfill disposable. Blue life indicator pellets turn white when the media is spent. A complimentary lab analysis is offered after 1 year in service to determine the remaining life of the media. This is especially helpful in creating an effective preventative maintenance program for odor control.

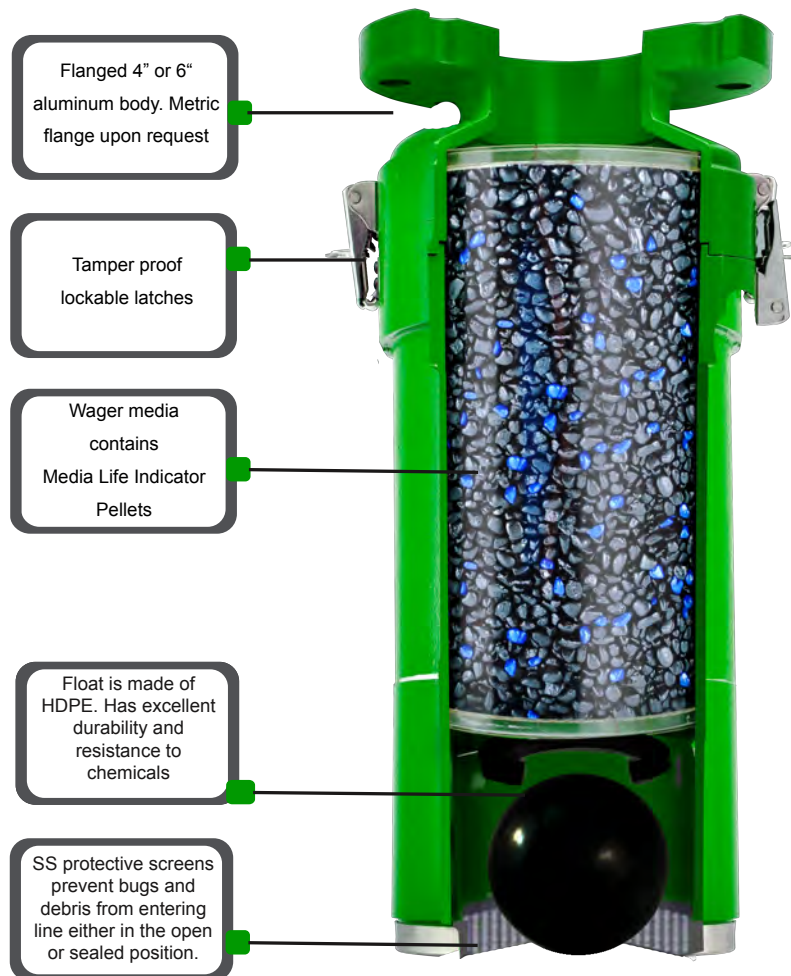

The 1850 is cast in aluminum with an epoxy coated finish. It is available in both 4" or 6" flanged end connection. A polyethylene float and neoprene seat are incorporated into the check valve. It uses all stainless steel hardware and insect screens to prevent corrosion.



WAGER
C O M P A N Y

WWW.WAGERUSA.COM
Toll Free USA: 800-562-7024